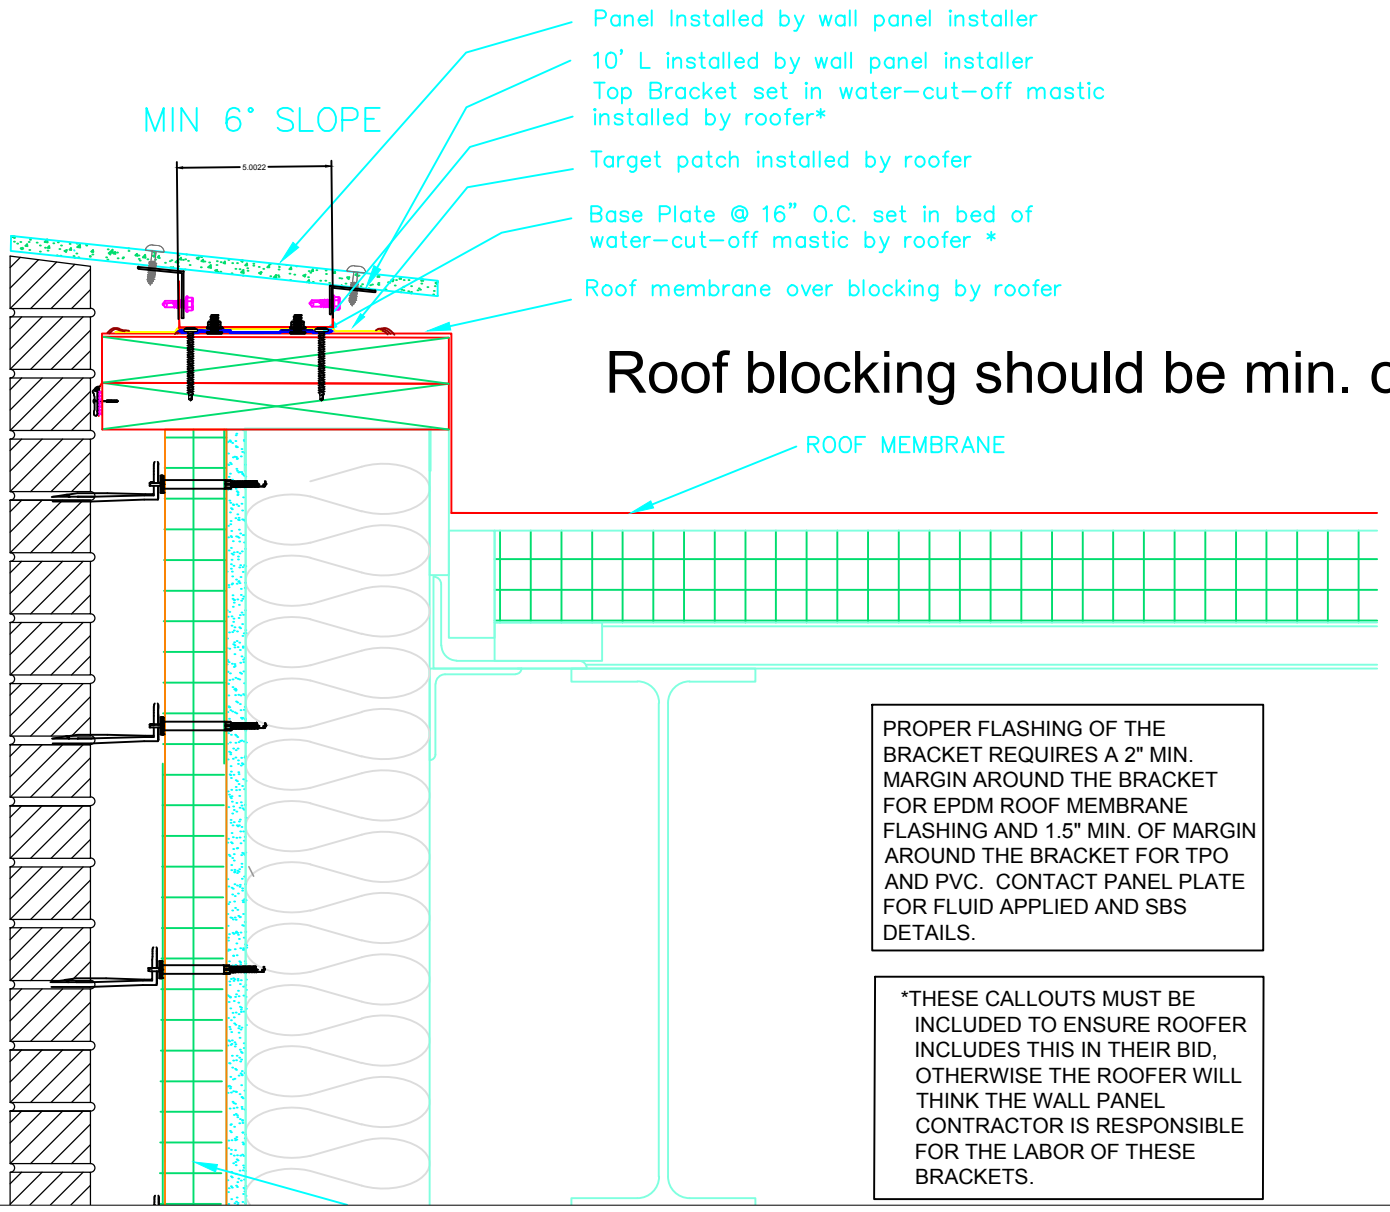

Roof blocking should be min. of 10" wide

PROPER FLASHING OF THE BRACKET REQUIRES A 2" MIN. MARGIN AROUND THE BRACKET FOR EPDM ROOF MEMBRANE FLASHING AND 1.5" MIN. OF MARGIN AROUND THE BRACKET FOR TPO AND PVC. CONTACT PANEL PLATE FOR FLUID APPLIED AND SBS DETAILS.

*THESE CALLOUTS MUST BE INCLUDED TO ENSURE ROOFER INCLUDES THIS IN THEIR BID, OTHERWISE THE ROOFER WILL THINK THE WALL PANEL CONTRACTOR IS RESPONSIBLE FOR THE LABOR OF THESE BRACKETS.

PANEL PLATE STANDARD BRICK VENEER

PP-S-04

Panel Plate